

# X5-SuperLite State-of-Charge Indicator (SOCl)

## URX-X5-SLITE Technical Datasheet



### Technical Specifications

Model No.	X5-SuperLite SOCl	
Part No.	URX-X5-SLITE	
Operating Temperature	0°C to +50°C	
Display Size	2.4in	
Size	Width: 100mm (3.94in) Depth: 22mm (0.87in) Height: 56mm (2.22in)	
Connections to X5-SuperLite Cradle	2x USB-C	
Certifications	IEC 60601-1 with the X5-SuperLite System	
Compatibility	Ultralife X5-SuperLite Battery Cradle (UCA-X5-3USBC)	

### Benefits & Features

- USB-C female connectors allow the pendant to be easily added or removed from the X5-SuperLite cradle(s) (UCA-X5-3USBC)
- View the state-of-charge of up to two URB-X5 batteries in two different X5-SuperLite cradles (UCA-X5-3USBC)
- State-of-charge shown as both a percentage and a bar
- Separate connection for each battery
- Estimated remaining time until battery depletion based on existing load
- Capacitive touch backlight brightness and night mode buttons


### Applications

- Ultralife X5-SuperLite Battery Cradle (UCA-X5-3USBC)
- Alternate systems with SMBus battery interfaces where battery capacity is desired (contact Ultralife for power stipulations)

### Cable Compatibility

- For use with UCA-X5-3USBC, connect with off-the-shelf USB-C to USB Mini cable
- For use with alternate systems, contact Ultralife for proper pinout for custom cable

## Dimensions

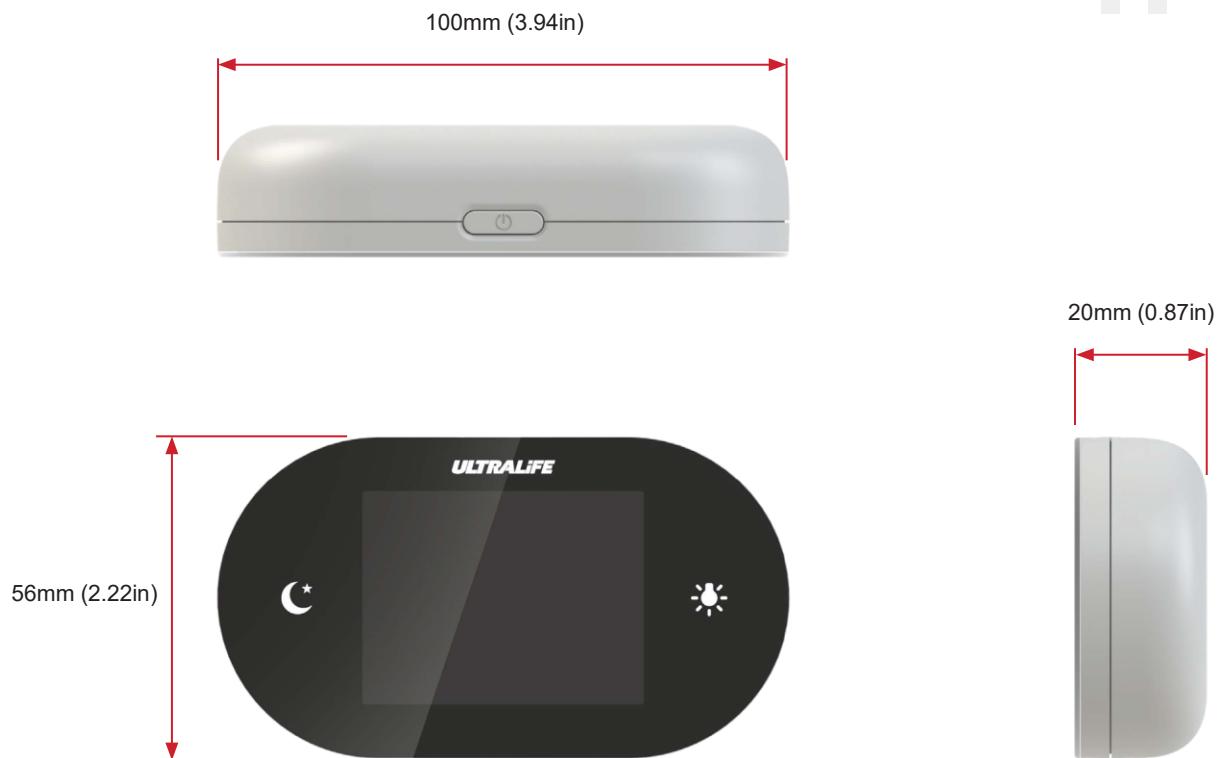

## User Interface

